



LC1200H

Art. no. LC1200H

**RIDE-ON TROWEL
HYDRAULIC STEERING & PETROL ENGINE**




CE

Lindec® LC1200H (hydraulic steering, petrol engine)

Lindec® LC1200H riding trowel has a powerful 37/35 Hp Vanguard petrol engine which drives twin 5-blade rotors to a top speed of 180 rpm's.

Lindec® LC1200H ride on power trowel (2x120 cm/46") have been engineered for the professional flooring contractors for best possible performance.

This new model has lot of standard features and advantages such as: High speed rotors, Flip up guard rings – for cheaper freight and easy blade switch. Flip up seat frame – for easy maintenance, service and repairs. Forklift pockets – for safer lifting. Super heavy duty gearboxes – for long lasting performance. Swedish design and Swedish production.

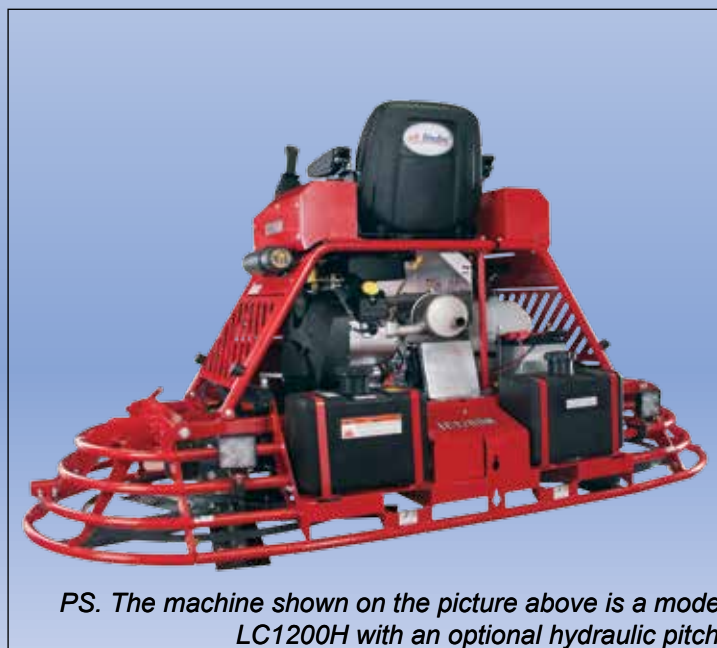

PS. The machine shown on the picture above is a model LC1200H with an optional hydraulic pitch.

ab lindec®

Box 5, 421 21 V. Frölunda, Sweden
+46 31 298810 export@lindec.se www.lindec.com

LC1200H ab lindec



Flip up guard rings
for cheaper freight
(227 cm) and easy blade
swops.



Forklift pockets
for safer lifting.



Pro operator seat



**Super heavy duty
gearboxes**
to secure maximum
performance and life
length.



Flip up seat frame
for easier maintenance, service and repairs.

Basic data:	LC1200H
Engine	Vanguard petrol engine 37/35 hp
Dimensions (L x W x H)	260 x 127 x 142 cm
Panning width (pan)	240 cm
Finishing width (blades)	234 cm
Rotors (Diameter)	117 cm, 5-bladed
Maximum rotor speed	180 rpm
Weight	600 kg
Fuel capacity	30 liter
Water capacity	30 liter

Accessories	
Transport wheels	art. no: LCDW
Pan 117 cm pan	art. no: 116266
Pan 117 composite pan	art. no: 11668
Trowel blades	art. no: 11514
Combination blades	art. no: 11564
Combi/finish blade (flat)	art. no: 11581
Trowel blades, plastic	art. no: 11576
Environmental petrol 5 liters canister	art. no: Aspen

Standard features

- Hydraulic steering
- 37/35 Hp Vanguard engine
- Torque Converter clutch
- Specially produced, super heavy duty spider arms containing seals to avoid concrete and concrete water getting into the spider cross, avoiding unnecessary maintenance.
- Prop shafts for best durability and easier steering
- Flip up seat frame for easy access to engine and drive shafts, for easier maintenance, service and repairs.
- Flip up guard rings for easy blade switches and cheaper transportations (227 cm)
- Forklift pockets for safer lifting.
- Four adjustable LED lights with possibility to two extra
- High speed (180 rpm) for superior finishing
- Electric main power switch
- Two adjustable hand trowel holders
- Water proof electric connectors
- Counters of engine speed and hours
- Spray system, optionally to double system
- Document box (service manual)
- Cup holders, adjustable seat
- Engine oil guard
- 12 V charger
- CE approved

ab lindec® endeavours to provide correct information about technical properties and handling of its products. However, while ab lindec® has no control over the way in which the products are mixed and laid, or the conditions under which they set, ab lindec® can in no way be held responsible. ab lindec® is only responsible for the quality of the products at the time of delivery.